


After opening the product package, please read this Conversion Procedures Manual.

**BANDAI  
NAMCO**

Games



## **ANIMAL KAISER -THE KING OF ANIMALS- Ver.5 Version Update Kit**

# **Conversion Procedures Manual**

The actual product you have received may differ slightly from the illustration.



**DANGER**

- To ensure safe operation of the product, be sure to read this Conversion Procedures Manual before performing the described conversion procedures and operating the game machine.
- Keep this Conversion Procedures Manual together with the "ANIMAL KAISER -THE KING OF ANIMALS- " or "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 3" or "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 4" Operation Manual so that it can be accessed whenever necessary.

**NAMCO BANDAI Games Inc.**

# INTRODUCTION

---

Thank you for purchasing the "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 5" Version Update Kit (hereafter referred to as the "product" ).

**The Conversion Procedures Manual (this manual) provides the following information:**

- Basic information for proper use of the product
- Correct method of updating your present "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 4" game machine to the "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 5" game machine.

**Inquiries concerning the game machine and repairs**

- For inquiries regarding this product or conversion using this product, contact your distributor.




# 1. SAFETY PRECAUTIONS - Be sure to read these instructions to ensure safety -


## Instructions to the owner

- If you entrust another party to perform the conversion using this product, instruct the conversion performing party to read and observe all the instructions and precautions in this manual regarding the particular action to be taken.


### 1-1 Magnitudes of risk

On the labels attached to the product and in this Conversion Procedures Manual, precautions regarding safety and property damage are classified as described below in accordance with the magnitude of the particular risk.

 **WARNING** : Failure to prevent the indicated risk may result in death or serious injury.

 **CAUTION** : Failure to prevent the indicated risk may result in minor injury or property damage.

Notes related to machine functions but not to safety are marked with the following indication.

 **NOTICE** : Note related to product function or protection.

### 1-2 Definition of the term "technician"

This Conversion Procedures Manual is written for arcade personnel. However, the sections marked **"To be conducted by a technician only"** in the table of contents are written for technicians. These tasks should be conducted by technicians only.

**Technician:** A person engaged in machine design, manufacture, inspection or maintenance service for a manufacturer of amusement equipment, or a person who has technical knowledge related to electricity, electronics or mechanical engineering at a level equal to or higher than that of a technical high school graduate and is engaged routinely in the maintenance and management (including repair) of amusement machines.

## 1-3 Top-priority safety precautions

### WARNING

- This product is a conversion kit designed to convert Namco Bandal Games' "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 4" game machine to the "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 5" game machine. Do not use the product with a game machine other than the "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 4" game machine. Use of the product for a purpose other than specified can result in an unexpected accident or other dangerous situation.
- Do not perform any conversion work that is not described in this Conversion Procedures Manual. Performing modifications not described in this manual can cause unexpected danger.
- Should any problem occur in the game machine after the conversion, turn off the power immediately to stop operating the machine. Then, unplug the power cord plug from the AC outlet. Operating the machine without correcting a problem may cause a fire or electric shock.
- Perform the conversion task after reading the Conversion Procedures Manual carefully and understanding the contents thoroughly. If the directions in the Conversion Procedures Manual are not followed closely, an unexpected accident or dangerous situation can result. If you have any questions regarding this product or conversion procedures, contact your distributor.
- Some parts of the monitor remain hot and charged with high voltage even after the power switch is turned off. To avoid electric shock and burns, be careful not to touch the monitor parts accidentally.
- Do not wet the power cord or power cord plug with water. Water can cause an electric shock or leakage.
- Do not touch the power cord plug with a wet hand. Doing so can result in an electric shock.
- The rated supply voltage and maximum consumption current of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 5" game machine (after conversion) are 220 VAC and 0.7 A, respectively. To prevent fire and electric shock, be sure to use interior wiring that conforms to these power supply specifications.
- Operate the machine with a power supply voltage in the range of 200 to 240 VAC. Operating the machine with a supply voltage outside the specified range may cause a fire or electric shock. To ensure that the machine operates in optimum condition, maintain the power supply at 220 VAC.

# CONTENTS

## INTRODUCTION

<b>1. SAFETY PRECAUTIONS - Be sure to read these instructions to ensure safety -</b>	<b>1</b>
1-1 Magnitudes of risk	1
1-2 Definition of the term "technician"	1
1-3 Top-priority safety precautions	2

<b>CONTENTS</b>	<b>3</b>
-----------------	----------

<b>2. SPECIFICATIONS</b>	<b>4</b>
2-1 Outline of the product	4
2-2 Outline of ANIMAL KAISER Ver. 5	4
2-2-1 Outline of the game	4
2-2-2 Game unit specifications	6
2-3 Conversion procedures using the kit	6

<b>3. CHECKING THE PACKAGE CONTENTS</b>	<b>7</b>
---	----------

<b>4. PREPARATION FOR CONVERSION</b>	<b>8</b>
4-1 Conversion procedures using the kit	8
4-2 Required tool and item	8
4-3 Required number of workers and work time	8
4-3-1 Required number of workers	8
4-3-2 Work time	8
4-4 Securing a required work area	9
4-5 Inspection of the machine - To be conducted by a technician only -	10

<b>5. CONVERSION PROCEDURES</b>	<b>11</b>
5-1 Conversion process flow	11
5-2 Software update	11
5-2-1 Software update - To be conducted by a technician only -	11
5-2-2 Error display - To be conducted by a technician only -	14
5-2-3 Troubleshooting - To be conducted by a technician only -	15
5-3 Replacing the sample cards - To be conducted by a technician only -	16
5-4 Installing the POP panel	17
5-5 Attaching the version tag	18
5-6 Handing the card list	19

<b>6. INSPECTION</b>	<b>20</b>
----------------------	-----------

<b>7. INSTALLATION</b>	<b>21</b>
------------------------	-----------

<b>8. DISCARDING UNNECESSARY PARTS</b>	<b>22</b>
--	-----------

<b>9. PARTS LIST</b>	<b>23</b>
----------------------	-----------

## 2. SPECIFICATIONS

### 2-1 Outline of the product

This product converts Namco Bandai Games' "ANIMAL KAISER -THE KING OF ANIMALS- Ver.4" game to "ANIMAL KAISER -THE KING OF ANIMALS- Ver.5." In addition to this product, you must arrange one unit of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.4" game machine.

### 2-2 Outline of ANIMAL KAISER Ver. 5

#### 2-2-1 Outline of the game

New factors below have been added to this product.

##### ■ Addition of new animals

The following 11 animals have been added:

- Scorch
- Vrede
- Schneider
- Baron
- Jinrai
- Ronaldo
- Dalba
- Shiro
- Vampire Bat
- Grey-headed Flying Fox
- Japanese Long-eared Bat

##### ■ Adding New Cards:

New cards have been added to the respective cards of Animal Strong Miracle:

- New Animal Card: 11 types
- New Strong Card: 8 types
- New Miracle Card: 3 types

##### ■ Changing Card Performance

The performance of the Miracle Card has been changed:

- New Miracle Card: 9 types

### ■ Changing Card Illustration

Illustrations of Animal Card, Strong Card, and Miracle Card have been renewed.  
(except for some cards)

### ■ Boss battle

In addition to the boss animal "Scorch," a new boss animal "Atlas" is now available to battle.

Select "Normal" during game play. If you win the second battle select "Challenge Scorch." Then, the battle with the boss animal "Scorch" starts.

Select "Strong" during game play. If you win the second battle select "Challenge The Forgotten Warrior." Then, the battle with the new boss animal "Atlas" starts.

In both "Normal" and "Strong," modes select "Challenge Another Animal" after winning the second battle. Then, the third battle starts in the same way till Ver. 4.

### ■ Vampire Attacks

"Vampire attacks" has been added.

"Vampire attacks" is a skill that a specific animal has. In proportion to the damage caused to the opponent, the animal's own physical strength is recovered.

Animals with the "Vampire attacks" skill	Vampire attacks
Vampire Bat	Bloody Nightmare
Grey-headed Flying Fox	Soul Drain
Japanese Long-eared Bat	Vampire Gulp

### ■ Holy Burst

"Holy Burst" has been added.

"Holy Burst" is an ability that specific animals have. As for an animal with the "Holy Burst" ability, when its physical strength decreases below a certain level after the animal is attacked by a skilful opponent, "Holy Burst" is activated. Then, until the battle round ends, all the skill levels of the animal stay at 5.

Animals with the "Holy Burst" ability	
Vrede	Schneider
Baron	Jinrai
Ronaldo	Daiba
Shiro	

### ■ Grand Dark Burst

"Grand Dark Burst" has been added.

"Grand Dark Burst" is an ability that specific animals have. As for an animal with "Grand Dark Burst" ability, when its physical strength decreases below a certain level after the animal is attacked with a skill of the opponent, "Grand Dark Burst" activates.

Then, until its own skill is released, it lowers the opponent's defense power and keeps the opponent's all the skill levels to 1.

Animal with the "Grand Dark Burst" ability	
Scorch	

### 2-2-2 Game unit specifications

The game machine specifications and installation conditions (dimensions of installed unit, installation area, rated power supply, etc.) of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver. 5" game machine (after conversion with this kit) are the same as those of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.4" game machine, as shown below.

(1) Rated power supply	220 ± 20 VAC (50/60 Hz)
(2) Rated power consumption	124 W
(3) Maximum current consumption	0.7 A
(4) Coin box capacity	Approx 200,000 yen (2,000 100-yen coins)
(5) Monitor	17-inch color CRT
(6) Dimensions	510 (W) x 680 (D) x 1,690 (H) [mm]
(7) Weight	As installed (total weight) : Approx. 100 kg

## 2-3 Conversion procedures using the kit

This product requires the following conversion processes.

- Software update
- Replacement of sample cards
- Installation of POP panel
- Attachment of version tag
- Handging the card list














### 3. CHECKING THE PACKAGE CONTENTS

The product package shipped from the factory contains the following components and parts.



- Make sure that all items shown below are contained in the product package.
- If any item is missing, contact your distributor.

#### • Accessory list

No.	Name	Specification	Qty.
1	ANIMAL KAISER -THE KING OF ANIMALS- Ver.5 Version Update Kit Conversion Procedures Manual	This documents 	1
2	Sample card (5A)(EXP)		1
3	Sample card (5B) (EXP)		1
4	Sample card (5C)(EXP)		1
5	Sample card (5D)(EXP)		1
6	Sample card (5E)(EXP)		1
7	POP (Ver.5)(EXP)		1
8	Card list (Ver. 5) (EXP)		300
9	Poster A (Ver. 5) (EXP)		1
10	Poster B (Ver. 5) (EXP)		1
11	Hook ring		1
12	String		1
13	Version Update Card (Ver.5)(EXP)		1

## 4. PREPARATION FOR CONVERSION

### 4-1 Conversion procedures using the kit

Before starting the conversion work, make sure that all items are provided in the kit.  
(See P. 7 "3. CHECKING THE PACKAGE CONTENTS.")

### 4-2 Required tool and item

Arrange the following tool and material necessary for performing the conversion work.

● Tool required for conversion work

• Allen wrench (2 mm across flats)



• Torx wrench (M5: 4 mm across flats)



● "ANIMAL KAISER -THE KING OF ANIMALS-" Operation Manual or "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3 " or "Ver.4" OPERATION MANUAL



OR



Ver.3

OR



Ver.4

### 4-3 Required number of workers and work time

#### 4-3-1 Required number of workers

One or more persons should perform the conversion work.


#### 4-3-2 Work time

It takes about 20 minutes for one worker (technician) to complete the conversion.



## 4-4 Securing a required work area

To perform the conversion work, secure a space of 50 cm to 1 m or more around the game machine.

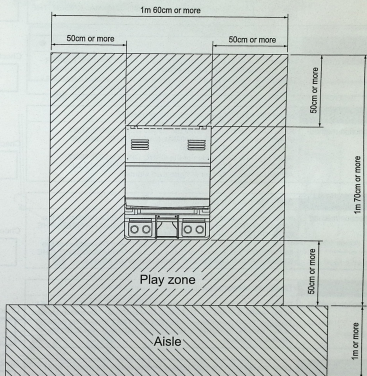

## 4-5 Inspection of the machine - To be conducted by a technician only -

Before starting the conversion work, inspect the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.4" game machine to make sure it operates properly.

If you discover any abnormality, refer to "8-2 Troubleshooting" on page 70 of the "Animal Kaiser - The King of Animals -or "8-2 Troubleshooting" on page 71 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.

Inspection item	Do all switches operate properly?	
Inspection method	Refer to "7-4-4 (a) Switch test" on page 44 of the "ANIMAL KAISER -THE KING OF ANIMALS- " Operation Manual. Refer to "7-4-4 (a) Switch test" on page 45 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.	Checked <input type="checkbox"/>
Inspection item	Do all lamps light?	
Inspection method	Refer to "7-4-4 (b) Lamp test" on page 45 of the "ANIMAL KAISER -THE KING OF ANIMALS- " Operation Manual. Refer to "7-4-4 (b) Lamp test" on page 46 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.	Checked <input type="checkbox"/>
Inspection item	Does the card dispenser operate properly?	
Inspection method	Refer to "7-4-5 Description of the CARD DISPENSER TEST screen" on page 46 of the "ANIMAL KAISER -THE KING OF ANIMALS- " Operation Manual. Refer to "7-4-5 Description of the CARD DISPENSER TEST screen" on page 47 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.	Checked <input type="checkbox"/>
Inspection item	Does the monitor display images?	
Inspection method	Refer to "7-3 Adjustment" on page 37 and "7-4-8 Description of the MONITOR TEST screen" on page 50 of the "ANIMAL KAISER -THE KING OF ANIMALS- " Operation Manual. Refer to "7-3 Adjustment" on page 38 and "7-4-8 Description of the MONITOR TEST screen" on page 51 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.	Checked <input type="checkbox"/>
Inspection item	Check sound reproduction.	
Inspection method	Refer to "7-4-9 Description of the SOUND TEST screen" on page 51 of the "ANIMAL KAISER -THE KING OF ANIMALS- " Operation Manual. Refer to "7-4-9 Description of the SOUND TEST screen" on page 52 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.	Checked <input type="checkbox"/>
Inspection item	Does the lamp on the card display section above the monitor light?	
Inspection method	Make sure that the cold-cathode tube lights.	Checked <input type="checkbox"/>
Inspection item	Does the card reader operate properly?	
Inspection method	Refer to "7-4-6 Description of the CARD READER TEST screen" on page 47 of the "ANIMAL KAISER -THE KING OF ANIMALS- " Operation Manual. Refer to "7-4-6 Description of the CARD READER TEST screen" on page 48 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.	Checked <input type="checkbox"/>

# 5. CONVERSION PROCEDURES

## 5-1 Conversion process flow

This section describes the following conversion procedures:

- |                               |                       |
|-------------------------------|-----------------------|
| 1 Software update             | Refer to Section 5-2. |
| 2 Replacement of sample cards | Refer to Section 5-3. |
| 3 Installation of POP panel   | Refer to Section 5-4. |
| 4 Attachment of version tag   | Refer to Section 5-5. |
| 5 Handling the card list      | Refer to Section 5-6. |



## 5-2 Software update

### 5-2-1 Software update - To be conducted by a technician only -

#### WARNING



- The power switch must be turned on to set the IC card. Therefore, an electric shock, accident or injury can result if the work is conducted carelessly. Do not touch any section other than those specified in the procedures.

- 1 Turn on the main power switch located on the rear side of the Cabinet Assy.





- 2 Using the provided maintenance key, open the front door on the front side of the Cabinet Assy, and then turn on the sub-power switch.

- \* If either the main power switch or sub-power switch is set to OFF, power will not be supplied to the machine.




- 3 Set the Test switch to ON.  
The MENU screen appears.




MENU screen

- 4 While the MENU screen is displayed, flip the Select switch up or down and select "VERSION UPDATE," and then press the Enter switch. The VERSION UPDATE screen appears.




VERSION UPDATE screen

- 5 If the IC card has already been inserted, choose "IC CARD EJECT" by using the Select switch and eject the inserted IC card.
- 6 Insert the Ver. 5 Version Update Card in the direction of the arrow, making sure that the front side is facing up.

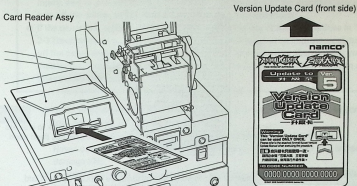

- 7 When the Version Update Card is inserted, the version update operation starts. When the following screen appears, press the Enter switch to eject the Version Update Card.
  - \* After the following screen appears, it is not possible to display another screen by using the Test switch, Select switch or Enter switch.



Update Completion screen

- 8 Insert the IC card that was inserted in the machine before the update process was performed.
- 9 Turn off the sub-power switch by referring to Step 2 on page 11.
- 10 Close the front door.



- The Version Update Card can be used only once. After the version update process has been completed, add a check mark in the box next to "Card Use Check Column" and dispose of the card in accordance with the local law.

Version Update Card (back side)



Add a check mark to indicate that the card has been used.

- \* This completes the software update by using the Version Update Card.

### 5-2-2 Error display - To be conducted by a technician only -

Message	Cause, remedy
This card has expired. Please insert a new Version Update Card.	The inserted Version Update Card has already been used to update the software in another game machine unit. Insert a new Version Update Card.
The updates on this card have already been installed on this machine. Please insert a newer Version Update Card.	The version of the inserted Version Update Card is older than the version of the current software. Insert a Version Update Card of the appropriate version (Ver. 5 → Ver. 4, etc.).
This card is invalid. Please insert a Version Update Card.	The version of the inserted Version Update Card is incorrect. Insert a Version Update Card of an appropriate version (Ver.3 → Ver. 5, etc.).
This card is not Version Update Card. Please insert a Version Update Card.	A card other than the Version Update Card has been inserted. Insert the correct Version Update Card.

## 5-2-3 Troubleshooting - To be conducted by a technician only -

**WARNING**

- To protect the service staff and other people from an electric shock, accident and injury, and to prevent damage to the electrical circuitry of the machine, always turn off the power switch before conducting the described task.
- If the generated problem symptom does not apply to any of the descriptions in "5-2-3 Troubleshooting" or if the action taken does not result in an improvement, turn off the power switch immediately to stop the machine operation, then contact your distributor. Operating the machine without correcting problems can result in an unexpected accident.

**NOTICE**

- In the event a machine problem occurs, first, check to make sure that all connectors are connected securely.
- If there is a problem in any of the PC boards, contact your distributor.  
Never use a tester to conduct a continuity test. Internal voltage of a tester can damage ICs.
- In order to prevent above-mentioned problems, if the error or problem can be reset or corrected by turning the Test switch ON/OFF, it is recommended not to turn off the power supply and turn it back on in order to ensure smooth game play.
- When sending parts for repair, pack them carefully to protect them from damage during transportation. When sending the Game PC Board, cover it completely with sponge or bubble wrap and place it in a corrugated cardboard box to protect it against external impact.


Symptom	Cause	Remedy	Page
During the software update process, the Game screen appeared instead of the Software Update screen.	The Version Update Card is not inserted correctly.	Insert the Version Update Card correctly and redo the update process.	Page 11
	The connector of the Game PC Board is disconnected.	Insert the connector firmly.	ANIMAL KAISER -THE KING OF ANIMALS- OPERATION MANUAL Page 75  ANIMAL KAISER -THE KING OF ANIMALS- Ver.3 or Ver.4 OPERATION MANUAL Page 76
	The Version Update Card or Game PC Board is faulty	Contact your distributor.	—
After the software update process was completed, the monitor does not display any image when the power is turned on.	The version update process was terminated improperly due to the removal of the Version Update Card in the middle of the update process.	Redo the software update process.	Page 11
	The Game PC Board is faulty.	Contact your distributor.	—

### 5-3 Replacing the sample cards - To be conducted by a technician only -

#### ⚠ WARNING

- To protect the service staff and other people from an electric shock, accident and injury, and to prevent damage to the electrical circuitry of the machine, always turn off the power switch before conducting the described task.

- 1 Turn off the sub-power switch.  
(See P. 11 "5-2-1 Software update" 2.)
- 2 Remove the three countersunk cap bolts (M3 x 10) and tilt the display cover forward to dismount.

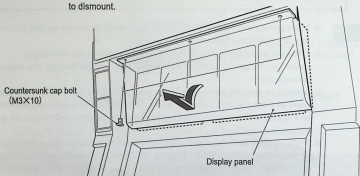

- 3 Remove the old cards.





- After detaching the old cards, remove double-side adhesive tape and tape glue thoroughly from the surface. If tape glue is left on the surface, the new sample cards will not adhere firmly.

- 4 Peel the backing papers from the new sample cards and attach them to the specified positions on the display plate.



- Make sure that the sample cards are attached securely to the display plate.



- 5 Reinstall the display cover by following the removal sequence in reverse.




## 5-4 Installing the POP panel

- 1 Peel the old POP and POP spacers off the POP panel.



- After detaching the old POP spacers, completely remove remaining double-sided adhesive tape and glue from the panel surface. If double-sided adhesive tape glue is remaining on the panel surface, the new POP spacers will not attach securely.


- 2 Remove the three backing papers from the double-sided adhesive tape on the back side of the POP (Ver. 5) (EXP) panel supplied in the conversion kit.



- 3 Using a neutral detergent diluted with water, wipe dust and dirt thoroughly from the surface of the POP panel. If oil or grease remains on the surface, the POP panel may not remain attached firmly.

- 4 Align the screw through-holes, and attach the POP panel.

After attaching the POP panel, press on the POP panel to ensure secure adhesion.

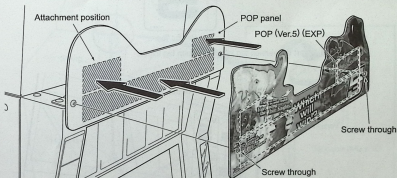


[ Completion diagram ]




## 5-5 Attaching the version tag

- \* Posting the version tag indicates clearly the type of game cards dispensed from the machine, thus providing a sense of assurance to players.
- \* The version tag is supplied with game cards.

- 1 Cut out the version tag along the dotted line on the card.




- 2 Insert the version tag into the version tag folder.




- To prevent confusion to players and possible complaints from players, do not conduct the following:
  - Sales without posting the version tag
  - Display of incorrect version tag

## 5-6 Handging the card list

- 1 Run the hook ring through the hole in the card list (50 sheets) and the loop at end of the string, and lock the hook ring.



- 2 Loosen the Torx bolt (M5 x 10) that holds the POP panel in place until the bolt head rises about 3 mm, then hook the loop at the other end of the string onto the Torx bolt and tighten the bolt securely.

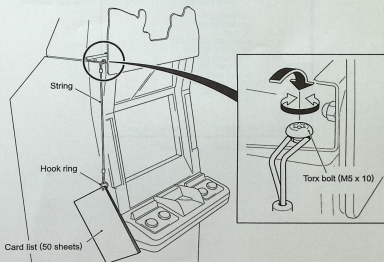


- Do not hang more than 50 card list sheets. Hanging more than 50 sheets may damage the hook ring.

## 6. INSPECTION

Check to make sure that the conversion has been completed properly.

- 1 Check to make sure that the conversion parts are assembled and installed correctly.
  - Make sure that all conversion parts provided in the kit are installed as specified.
- 2 Check to make sure that the warning labels are legible.  
(See "1-4 Description of warning labels attached to the machine" on page 3 of the "ANIMAL KAISER -THE KING OF ANIMALS-" or "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.)
- 3 Open the front door of the Cabinet Assy and set the Test switch to ON.  
The MENU screen appears.  
(See "7-3-2 Adjustment switches" on page 38 of the "ANIMAL KAISER -THE KING OF ANIMALS-" or "7-3-2 Adjustment switches" on page 39 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.)
- 4 Check to make sure that the software version is "5.00."




MENU screen (after update)

## 6. INSPECTION

Check to make sure that the conversion has been completed properly.

- 1 Check to make sure that the conversion parts are assembled and installed correctly.
  - Make sure that all conversion parts provided in the kit are installed as specified.
- 2 Check to make sure that the warning labels are legible.  
(See "1-4 Description of warning labels attached to the machine" on page 3 of the "ANIMAL KAISER -THE KING OF ANIMALS-" or "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.)
- 3 Open the front door of the Cabinet Assy and set the Test switch to ON.  
The MENU screen appears.  
(See "7-3-2 Adjustment switches" on page 38 of the "ANIMAL KAISER -THE KING OF ANIMALS-" or "7-3-2 Adjustment switches" on page 39 of the "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.)
- 4 Check to make sure that the software version is "5.00."



MENU screen (after update)

## 7. INSTALLATION

---

For installation of the game machine, follow the directions in "5. INSTALLATION" on page 13 of the "ANIMAL KAISER -THE KING OF ANIMALS-" or "ANIMAL KAISER -THE KING OF ANIMALS- Ver.3" or "Ver.4" Operation Manual.

## 8. DISCARDING UNNECESSARY PARTS


---



### WARNING

- When discarding unnecessary parts after completing the conversion, make sure that they are collected, transported and discarded in accordance with the laws and regulations.
- When entrusting third-party companies to collect, transport and discard unnecessary parts after completing the conversion, be sure to use specialized companies to perform those tasks.

## 9. PARTS LIST



No.	Name	Qty.	Type and rating	Part No.
1	ANIMAL KAISER -THE KING OF ANIMALS- Ver.5 Version Update Kit Conversion Procedures Manual	1	This documents	726-330
2	Sample Card (5A)(EXP)	1		726-331
3	Sample Card (5B)(EXP)	1		726-332
4	Sample Card (5C)(EXP)	1		726-333
5	Sample Card (5D)(EXP)	1		726-334
6	Sample Card (5E)(EXP)	1		726-335
7	POP(Ver.5)(EXP)	1		726-336
8	Game Card (Ver.5)(EXP)	1	600 cards per box	307-456
9	Card list (Ver.5)(EXP)	1	300 cards per set	726-337



© NAMCO BANDAI Games Inc.

Part No. : 726-330

First Edition Published in November 2010